
NOTE NO. 1 3/4" EXPANSION JOINT WITH 3/4"x24" SMOOTH DOWELS & 16" PAPER TUBES. DOWELS SHALL BE GREASED THE FULL LENGTH. ALL PAPER TUBES SHALL BE PLUGGED OR CRIMPED ON OPEN END. ALL JOINTS SHALL BE SEALED. DOWELS SHALL BE SUPPORTED BY AN APPROVED SUPPORT MADE OF NO. 7 AWG WIRE.

NOTE NO. 2 CONTRACTION JOINT SCORED 1/3 THE DEPTH OF THE CONCRETE. JOINT SHALL BE SEALED.

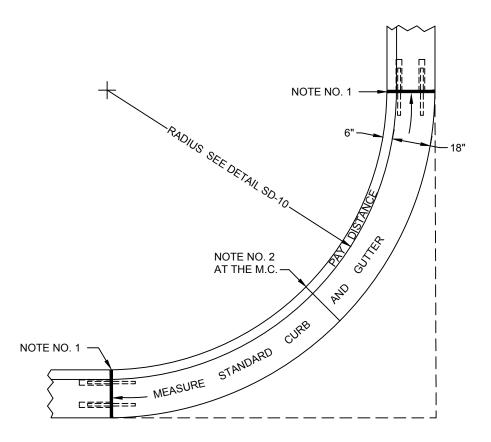

CITY OF WATFORD CITY, NORTH DAKOTA PUBLIC WORKS DEPARTMENT

INTERSECTION CURVE

APPROVED FOR PUBLICATION DWG. NO.

Gity Engineer Date